

VALMETAL

V59

540 R.P.M.

or

V59 HV

1000 R.P.M.




FORAGE BLOWER

V59 & V59HV



Independent adjustable wheels for easy installation and transport.

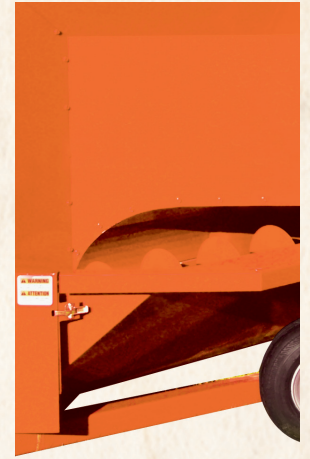

On the V59HV 1000 RPM drive. Reduces the speed from 1000 to 650 R.P.M.

The auger is driven by 2 sets of double 5VX type V-belts on cast iron pulleys.

The larger 14" (355mm) or 16" (405mm) dia. auger ensures a positive and even feed to the fan. The throw-out clutch is efficient, easily accessible and safe.

Technical Data

V59

V59HV

H.P. RECOMMENDED

min. 60 h.p.
max 150 h.p.

min. 150 h.p.
max 200 h.p.

FEED AUGER

Diameter

14" (35.5 cm)

Pitch

10" (25.4 cm)

MAIN FAN

Blade

8

Diameter

59" (150 cm)

WEIGHT

1496 lbs (680 kg)
(without 1000 R.P.M. gear box)

OPTION

Feed auger with 16" (405mm) pitch
(min. 150 h.p.)

Over running clutch kit



The shearbolt is easily accessible thanks to the hinged safety guard with incorporated spare shearbolt holder.



All drive mechanisms can be easily reached thanks to hinged protection doors. The feed auger has a 2" (50,8mm) dia. drive shaft mounted on 2 cast iron flanged ball bearings.

VALMETAL

230, boul. Industriel, St-Germain (Québec)
Canada J0C 1K0

Tel: (819) 395-4282

Fax: (819) 395-2030

info@valmetal.com

www.valmetal.com

15497 HWY 131, Tomah, WI
54660 USA

Tel: (608) 374-2206

Fax: (608) 374-2302

Because VALMETAL INC. is constantly improving products, we reserve the right to change design and / or specifications without notice.

For more details, contact: